

09-14-00

A

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)*(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
28569.6500

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

OPTICAL DISC APPARATUS

and invented by:

Yuu OKADA; Kenji FUJIUNE; Katsuya WATANABE; Takeharu YAMAMOTO; and Jun KIKUCHIIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 47 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
28569.6500

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 20
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☐ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail *(Specify Label No.):* EM339435219US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
28569.6500

Total Pages in this Submission

Accompanying Application Parts (Continued)


15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
Priority is hereby claimed under 37 C.F.R. §1.55 and 35 U.S.C. §119 based on prior foreign Application No. 11-258578 filed in Japan on September 13, 1999. A certified copy of the priority document will follow.
16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	22	- 20 =	2	x \$18.00	\$36.00
Indep. Claims	1	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$726.00

- ☒ A check in the amount of \$726.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-2814 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Michael K. Kelly, Reg. No. 32,848
SNELL & WILMER
One Arizona Center
400 E. Van Buren Street
Phoenix, AZ 85004-2202
P: (602) 382-6291
F: (602) 382-6070

Dated: September 13, 2000

CC:

1. *Chlorophyll a* (Chl *a*)

[illegible]

—

1. FIELD OF THE INVENTION:

10

15

20

25

30

[illegible]

source 103, e.g., a semiconductor laser, for generating a light beam 110 and a converging lens 107. The optical disc apparatus further includes a disc motor 102 for rotating the disc at a predetermined number of revolutions. The light beam 110 emitted from the light source 103 is converged by the converging lens 107, whereby the light beam spot 111 is formed on the information surface of the disc 101. A focus actuator moves the converging lens 107 in a direction perpendicular to the disc surface, thereby changing the position of the focal point of the light beam. The reflecting light from the light beam spot 111 on the disc 101 passes through the converging lens 107 and then enters a 4-region photodetector 109.

The 4-region photodetector 109 is divided into four regions A to D. The signals detected by the diagonally positioned regions are added together by an adder 121, whereby summation signals are created. Specifically, the signals detected by the regions A and D are added to create a summation signal A+D, and the signals detected by the regions B and C are added to create a summation signal B+C. The summation signal B+C is then subtracted from the summation signal A+D, whereby a differential signal is created. A focus error signal FE is created from the differential signal by using an astigmatic method in which the differential signal is smoothed by a low pass filter (LPF) 123. The focus error signal FE is input to a digital signal processor (DSP) 125, and then through filter calculation such as adding, multiplying, shift processing by a focus servo control section 125a, a drive signal FOD is created and output from the DSP 125. The current of the drive signal FOD is amplified by a focus driving circuit 126, thereby driving a focus actuator 127. Accordingly, the

focus servo is achieved.

During a reproducing/recording of the information, the optical disc not only rotates but also moves up and down in a direction perpendicular to the information surface of the disc, i.e., axial deviation occurs. Referring to Figure 21, the problem of the focus pull-in will now be described in the case where the axial deviation is significant. Figure 21 shows the relationship between the focal point of the light beam and the position of the information surface on the disc.

As shown in Figure 21, in the case where the relative speed of the information surface of the disc to the focal point is great due to the axial deviation during a high-speed rotation of the disc, the focus servo can not follow the axially deviating motion of the disc and therefore the focus pull-in fails. As a result, the focus servo is not achieved. In order to solve this problem, in the conventional example shown in Figure 20, the rotation phase of the disc is detected using a rotation phase detector 112 and the focus pull-in section 125b in the DSP 125 repeatedly conducts the focus pull-in attempt by changing the movement of the focal point of the converging lens, as shown by a through d in Figure 21. Based on the detected rotation phase of the disc, the focus pull-in is repeated. When the rotation phase of the lens comes to the point where the relative speed of the information surface of the disc to the focal point becomes minimum, the focus servo is achieved.

When a disc is rotated for high-speed reproduction, the acceleration of eccentricity and the acceleration of axial deviation of the optical disk increase in proportion

to the square of the rotation speed of the disc. In order to follow this acceleration of the axial deviation, the gain crossover point of the servo system and the thrust of the actuator are increased according to the conventional method.

5 However, a significant axial deviation of the disc reduces the range of the disc rotation phase in which the speed of the axial deviation is at or below the level at which a successful focus pull-in is possible. Therefore, it is necessary to change the focus point of the light beam by
10 small steps. This reduces the possibility of obtaining the rotation phase in which a successful focus pull-in is possible. As a result, the number of focus pull-in attempts increases and thus it takes longer before a successful focus pull-in.

15

SUMMARY OF THE INVENTION

According to one aspect of this invention, there is provided an optical disc apparatus including: a converging
20 section for converging a light beam and irradiating a rotating information medium with the converged light beam; a moving section for moving the converging section, thereby moving a converging point of the converged light beam in a direction perpendicular to an information surface of the
25 information medium; a converging state detection section for generating a focus servo signal which represents a converging state of the light beam on the information medium based on reflected light or transmitted light of the light beam from the information medium; a focus servo control
30 section for controlling the moving section based on the focus servo signal, so that the light beam reaches a predetermined converging state on the information medium; and a focus pull-in section for turning ON the control by the focus servo

5

10

20

30

5

10

20

25

30

S-shape signal detection section detects the S-shape signal by either moving the converging point of the light beam toward or away from the information surface of the information medium, or making the converging point of the light beam wait at an predetermined position.

In still another embodiment of the invention, the S-shape signal detection section detects the S-shape signals by retrying to move the converging point of the light beam toward the information surface of the information medium at a predetermined speed, in the case where the interval is not output from the detected interval measuring section after the elapse of time required for one revolution of the information medium.

In still another embodiment of the invention, a retry speed of the converging point of the light beam is set so as to be smaller than a speed of the previous motion toward or away from the information surface of the information medium.

In still another embodiment of the invention, the S-shape signal detection section detects the S-shape signals by making the converging point of the light beam wait at a predetermined position in the case where the interval is not output from the detected interval measuring section after the elapse of the time required for one revolution of the information medium after the time when one of the S-signals was detected, or the elapse of the first period which is slightly shorter than the time required for one revolution of the information medium.

In still another embodiment of the invention, the

5

10

15

25

30

[illegible]

5 In still another embodiment of the invention, the optical disc apparatus further includes an information medium identification section for identifying the type of the information medium by a signal based on reflecting light or transmitting light from the information medium, wherein the focus pull-in section determines a moving speed or a waiting position of the converging point of the light beam when the focus pull-in section moves the converging point of the light beam toward or away from the information surface of the information medium, or makes the converging point of the light beam wait at a predetermined position.

In still another embodiment of the invention, the conversion point of the light beam, moving toward the information surface of the information medium, is kept at a predetermined driving value based on the detection result of the type of the information, whereby the conversion point of the light beam is kept from approaching unnecessarily close to the information medium.

25 In still another embodiment of the invention, the optical disc apparatus includes a lower limit detection section for detecting the lower limit of an output signal of the focus servo control section or an input signal thereof during the operation of the focus servo control section, and a lower limit storing section for storing the detected lower limit, wherein, in the case where the focus servo control section is restarted after the focus servo control section is OFF: it is determined that the converging point

10

15

20

25

30

[illegible]

and understanding the following detailed description with reference to the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

5

Figure 1 illustrates a structure of an optical disc device according to Example 1 of the present invention;

Figure 2 illustrates the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc according to Example 1;

Figure 3 is a flowchart for the determination
15 process of Figure 2;

Figure 4 illustrates a focus pull-in according to Example 1:

20 Figure 5 illustrates the determination of the
positional relationship between the focal point of the
converging lens and the information surface of the disc
according to Example 1;

25 Figure 6 illustrates the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc according to Example 1;

30 Figure 7 illustrates the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc according to Example 1;

Figure 8 illustrates the waveforms of S-shape signals in a focus error signal FE;

5 Figure 9 illustrates the waveforms of S-shape
signals in a focus error signal FE;

Figure 10 illustrates the waveforms of S-shape signals in a focus error signal FE;

Figure 11 illustrates a structure of an optical disc device according to Example 2 of the present invention;

Figure 12 illustrates the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc according to Example 2;

Figure 13 is a flowchart for the determination
20 process of Figure 12;

Figure 14 illustrates the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc according to Example 2;

Figure 15 illustrates a structure of an optical disc device according to Example 3 of the present invention;

30 Figure 16A illustrates the relationship between the
thickness of the disc base material and the focal point:

Figure 16B illustrates the relationship between the

thickness of the disc base material and the focal point;

Figure 16C illustrates the relationship between the thickness of the disc base material and the focal point;

5

Figure 17 is a flowchart illustrating the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc according to Example 3;

10

Figure 18 illustrates a structure of an optical disc device according to Example 4 of the present invention;

15

Figure 19A illustrates the movement of the information surface of the disc due to the axial deviation.

20

Figure 19B illustrates the waveform of the focus error signal (FE) generated in response to the movement in Figure 19A.

25

Figure 19C illustrates the waveform of the output signal of the focus servo control section 125a (LFF output) through a low pass filter.

30

Figure 20 illustrates a structure of a conventional optical disc device; and

Figure 21 illustrates the focus pull-in operation according to the conventional optical device.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A rotating optical disc sways up and down in a

15 In view of the above, a focus pull-in section in the optical disc apparatus of the present invention first determines whether or not the focal point of the light beam is located in the vicinity of the minimum velocity position on the information medium axial deviation. If it is
20 determined that the focal point of the light beam is located in the vicinity of the minimum velocity position on the information medium axial deviation, the focus pull-in section turns ON a control of a focus servo control section. This position determination is carried out using S-shape
25 signals which appear in a focus servo signal when the focal point of the light beam contacts the information surface of the information medium.

30 Examples of the present invention will now be described with a special reference to structures and methods used for the position determination by the focus pull-in section.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

(Example 1)

Figure 1 shows a structure of an optical disc apparatus 100 according to Example 1 of the present invention.

5 The optical disc apparatus 100 includes an optical system for irradiating a light beam on a disc 101 (i.e., an information medium) and forming a light beam spot 111 thereon. The optical system includes a light source 103, 10 e.g., a semiconductor laser, for generating a light beam 110, a coupling lens 104, a polarization beam splitter 105, a polarization hologram element 106, and a converging lens 107. The optical disc apparatus 100 further includes a disc motor 102 for rotating the disc at a predetermined 15 number of revolutions per minute. The rotation speed of the disc 101 can be detected by the frequency generator (FG) 130. The light beam 110 emitted from the light source 103 is converged by the converging lens 107, whereby the light beam spot 111 is formed on the information surface of the disc 101. 20 A focus actuator 127 moves the converging lens 107 in a direction perpendicular to the disc surface, thereby changing the position of the focal point of the light beam. The reflecting light from the light beam spot 111 on the disc 101 passes through the converging lens 107 and then enters a 4-region photodetector 109. Although the 4-region 25 photodetector 109 in the structure in the Figure 1 detects reflecting light from the disc 101, the 4-region photodetector 109 may alternatively detect transmitted light by appropriately modifying the structure of the apparatus or the arrangement of the sections in the 30 apparatus.

The 4-region photodetector 109 is divided into four

09660766-09460

regions A to D. The signals detected by the diagonally positioned regions are added together by an adder 121, whereby summation signals are created. Specifically, the signals detected by the regions A and D are added to create a summation signal A+D, and the signals detected by the regions B and C are added to create a summation signal B+C. The summation signal B+C is then subtracted from the summation signal A+D, whereby a differential signal is created. A focus error signal FE is created from the differential signal by using an astigmatic method in which the differential signal is smoothed by a low pass filter (LPF) 123. The focus error signal FE represents the converging state of the light beam and is herein alternatively referred to as a focus servo signal. The focus error signal FE is input to a digital signal processor (DSP) 125 through an A/D converter 125i.

The DSP 125 includes a focus servo control section 125a, a focus pull-in section 125p, and a switch 125g for closing a focus servo. These elements are constituted using a core program (μ code, etc.) stored in the DSP 125. The focus pull-in section 125p includes a control section 125q, an S-shape signal detection section 125h, a detected interval measuring section 125d, an interval comparing section 125c, and a lens position moving section 125f. The DSP 125 also includes the A/D converter 125i for taking in the focus error signal FE and a D/A converter 125j for outputting a focus driving signal FOD.

The focus error signal FE is input to the focus pull-in section 125p and the focus servo control section 125a through the A/D converter 125i. At the

beginning of the focus pull-in operation, the switch 125g is coupled to the lens position moving section 125f. The focus pull-in section 125p performs the pull-in operation based on the focus error signal FE (This operation will be described later in more detail).

If the pull-in is successful, switch 125g switches so as to be coupled to the focus servo control section 125a and then the focus servo control section 125a performs a focus servo. The focus servo control section 125a carries out filter calculations such as adding, multiplying, and/or shift processing, thereby creating the focus driving signal FOD, which is then output to a focus driving circuit 126 through the D/A converter 125j. The focus driving circuit 126 amplifies the current of the focus driving signal FOD and drives a focus actuator 127. Accordingly, the focus servo is achieved in a manner where the light beam 110 on the disc 101 brought into a predetermined converging state.

With reference to Figures 2 and 3, the focus pull-in operation will now be described in more detail. According to the focus pull-in operation of the present invention, a position determination is first carried out in which whether or not the converging point of the light beam is located in the vicinity of the minimum velocity position on the information medium axial deviation is determined. Figure 2 illustrates the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc, and Figure 3 is a flowchart for explaining the determination process of Figure 2.

In order to prevent a collision of the converging lens 107 with the disc 101, the initial distance between the converging lens 107 and the disc 101 should be set with an appropriate allowance. In this state, the focal point of the light beam is at Point O. The switch 125g is coupled to the lens position moving section 125f, and the output of the lens position moving section 125f is output as the focus driving signal FOD through the D/A converter 125j.

The lens position moving section 125f, which is controlled by the control section 125q, outputs triangle shape waves for maintaining the position of the converging lens 107, or triangular waves for moving the converging lens 107 toward or away from the disc 101 at a predetermined speed.

The focus driving signal FOD, which is output from the lens position moving section 125f through the D/A converter 125j, is used for moving the converging lens 107 toward the information surface of the disc 101. The focus driving signal FOD is set so as to move the converging lens 107 from Point O to Point A in Figure 2 at a relatively high speed, thereby reducing the time required for the operation (Step S10 in Figure 3).

S-shape signals appear in the focus servo signal when the converging point of the light beam contacts the information surface of the information medium (e.g., at point A). The S-shape signals are detected by the S-shape signal detection section 125h. When the detected S-shape signal is input to the control section 125q from the S-shape signal detection section 125h, the control section 125q instructs the lens position moving

5

10

15

25

30

As the converging lens 107 approaches to the disc 101, the focus error signal FE changes as shown in Figure 4. When the focus error signal FE reaches the focus pull-in level (i.e., Point P in Figure 4), the control section 125g switches the switch 125g so as to couple the switch 125g to the focus servo control section 125a (i.e., the focus servo is closed). The output of the focus servo control section 125a is output through the D/A converter 125j. In response to this output, the converging point of the light beam is pulled in toward the target control point M. The light beam follows the disc 101 so as to create a predetermined converging state at Point M (Steps S14, S15, S16). The pull-in level can be set in terms of, e.g., the amount of the axial deviation, the number of disc revolution, control level of the focusing or tracking, or the like.

As shown in Figure 5, if the output of the detected interval measuring section 125d exceeds the time T2 required for the one revolution of the disc, it is determined that the focal point of the converging lens 107 has already passed by the lower axial deviation limit. Therefore, the control section 125g moves the converging lens 107 toward the information surface of the disc 101 at a still lower speed (In order to stabilize the pull-in, it is preferable to set the speed lower than the speed at which the converging lens 107 was moved away from the disc). The pull-in level is determined with regard to the subsequently detected focus error signal FE and then the switch 125g is switched, thereby the focus pull-in operation is achieved (Steps S17 and S18 in Figure 3).

As shown in Figure 6, if the next S-shape signal is not detected (i.e., the detected interval measuring

section 125d does not generate an output) even after the elapse of the first period T1 after the time when the previous S-shape signal is detected, the control section 125g sends an instruction signal to the lens position moving section 125f so as to stop the motion of the lens position moving section 125f, thereby making the converging point of the light beam wait at Point G, which is located in the vicinity of the lower axial deviation limit. As the disc deviates down toward the converging lens 107, next S-shape signal in the focus error signal FE is detected. With regard to the S-shape signal, the focus pull-in level is determined in the manner described above. Based on the result of the level determination, the control section 125g outputs a signal for switching the switch 125g which is coupled to the lens position moving section 125f, to be coupled to the focus servo control section 125a (Point H in Figure 6), whereby the output of the focus servo control section 125a is output through the D/A converter 125j. The focus servo is thus achieved. According to this method, the time required for the focus pull-in can be reduced.

When the focal point exceeds the upper side of the information surface of the disc 101, the time required for the focus pull-in can be reduced by lowering the converging lens 107 at a relatively high speed, as shown in Figure 7. In order to determine whether the focal point is located at the upper side of the information surface or the lower side of the information surface, the polarity of S-shape signals in the focus error signal FE is used. This determination process will now be described with reference to Figures 8 and 9.

As shown in Figures 8 and 9, S-shape signal

20

30

As described above, according to Example 1 of the present invention, the pull-in operation is started after detecting that the converging point of the light beam is located in the vicinity of the position where the axial deviation velocity of the disc is substantially minimum. Therefore, even if the rotation speed of the disc is high and the axial deviation speed is significant, it is possible to prevent the disc from colliding to the converging lens 107 and prevent an overcurrent from flowing, thereby achieving a stable focus pull-in.

Although according to the optical disc apparatus 100 in Figure 1, the disc 101 is positioned horizontally and the converging lens 107 is located under the disc 101, the present invention is not limited by the positional relationship between the disc and the converging lens. For example, the disc can be placed vertically and the converging lens can be moved horizontally. This is also applicable to Examples 2 to 4 described later.

Sections usually included in an optical disc apparatus, such as a tracking control section, a tracking drive circuit, a tracking actuator, etc. are not shown in Figure 1. Conventional structures can be used for these sections, and thus the explanation thereof is omitted. This is also applicable to Examples 2 to 4 described later.

(Example 2)

An optical disc apparatus according to Example 2 of the present invention will now be described. According to Example 2, whether or not the converging point of the light beam is located in the vicinity of the minimum velocity

position on the information medium axial deviation is determined by a focus pull-in section by measuring the time width of a predetermined portion of an S-signal in a focus error signal FE. With reference to Figure 10, the principles for the process will now be described.

Figure 10 illustrates an S-shape signal in a focus error signal FE. The level L represents the level of the amplitude, which is 50% of half the amplitude of the S-shape signal, and T represents the time interval between the time at which the amplitude reaches the level L and the time at which the amplitude returns the level L. Shorter the interval T, faster the relative speed of the information surface to the converging lens 107, and longer the interval T, slower the relative speed of the information surface to the converging lens 107. A small relative speed means that the converging point of the light beam is located in the vicinity of the minimum velocity position on the information medium axial deviation. According to the present example, by measuring the time width of a predetermined portion of an S-signal in a focus error signal FE (i.e., the portion corresponding to the level L), the relative speed of the information surface to the converging lens 107 is detected. The level L is not limited to 50% of half the amplitude of the S-shape signal. It may be set greater or smaller than 50% of half the amplitude of the S-shape signal.

Figure 11 illustrates a structure of an optical disc device according to Example 2 of the present invention. Configurations other than the focus pull-in section 125p are substantially the same as the configurations shown in Example 1 (Figure 1). The operation of the focus pull-in section in Example 2 will now be described. The

explanations for the other sections will be omitted.

As shown in Figure 11, the focus pull-in section according to the present example includes an S-shape signal time width measuring section (time width measuring section) 1251 instead of the detected interval measuring section 125d in Example 1 (Figure 1). The interval T shown in Figure 10 is measured by the S-shape signal time width measuring section 1251.

With reference to Figures 11, 12 and 13, it will be described how the process for determining whether or not the converging point of the light beam is located in the vicinity of the minimum velocity position on the information medium axial deviation is performed by measuring the time width of a predetermined portion of an S-signal. Figure 12 illustrates the determination of the positional relationship between the focal point of the converging lens and the information surface of the disc according to the present example, and Figure 13 is a flowchart for explaining the determination process of Figure 12.

In order to prevent a collision of the converging lens 107 with the disc 101, the initial distance between the converging lens 107 and the disc 101 should be set with an appropriate allowance. In this state, the focal point of the light beam is at Point O. The switch 125g is coupled to the lens position moving section 125f, and the output of the lens position moving section 125f is output as the focus driving signal FOD through the D/A converter 125j.

The lens position moving section 125E first outputs a focus driving signal FOD through an D/A converter 125J.

for moving a converging lens 107 toward an information surface of a disc 101. The focus driving signal FOD is set so as to move the converging lens 107 from Point O to Point A in Figure 12 at a relatively high speed, thereby reducing the time required for the operation (Step S20 in Figure 13).

At Point A in Figure 12, an output signal of the S-shape signal time width measuring section 125l is input to the control section 125g from the S-shape signal time width measuring section 125l. The control section 125g then instructs the lens position moving section 125f so as to move the converging lens 107 in a direction away from the information surface of the information medium in a manner where the light beam follows the points B, C, D... at a relatively small speed (Steps S21, S22, and S23). The relatively small speed is preferably a speed sufficiently lower than the axial deviation velocity of the disc, so that the detection of the S-shape signal is accurately carried out.

A time width comparing section 125k compares the time width measured by the S-shape signal time width measuring section 125l and a predetermined second period T3. The second period T3 can be obtained from the optical distance between two S-shape signals and the moving speed of the beam at that moment (the relative speed determined by the pull-in speed and the disc rotation speed). For example, when the optical distance between l1 and l2 shown in Figure 10 is 10 μ m and the moving speed is 10 mm/s, $T3 \approx 1$ ms. The control section 125g determines that the interval detected at any moment of the operation exceeds the second period T3 (Point G in Figure 12). Based on this determination result, the control section 125g then

determines whether or not the level of the focus error signal FE reaches a predetermined pull-in level (see Figure 4). If it does, the control section 125g outputs a switching signal to the switch 125g, so as to couple the switch 125g to the focus servo control section 125a. The output of the focus servo control section 125a is output through the D/A converter 125j, whereby the focus servo is achieved (Steps S24 and S25).

When the focal point is beyond the upper side of the information surface of the disc 101, the time required for the focus pull-in can be reduced by lowering the converging lens 107 at a relatively high speed, as shown in Figure 14. In order to determine whether the focal point is located at the upper side of the information surface or the lower side of the information surface, the polarity of S-shape signals in the focus error signal FE is used. As shown in Figures 8 and 9, S-shape signal detection levels L1 and L2 are set in a similar manner used in Example 1, so that the levels L1 and L2 are approximately 50% of half the amplitude of an S-shape signal in the focus error signal FE. The S-shape signal detection section 125h detects that the level of the focus error signal FE reaches L1 and L2, and outputs the information to the control section 125g. When the polarity of the focus error signal changes in L1-L2 order, the control section 125g moves the converging lens 107 away from the information surface of the disc 101 at a relatively high speed. When the polarity of the focus error signal changes in L2-L1 order, the control section 125g moves the converging lens 107 away from the information surface of the disc 101 at a relatively low speed. The operation described above provides the motion of the converging lens 107 as described in Figure 14, thereby reducing the

15 As described above, according to Example 2 of the present invention, the pull-in operation is started after detecting that the converging point of the light beam is located in the vicinity of the position where the axial deviation velocity of the disc is substantially minimum. 20 Therefore, even if the rotation speed of the disc is high and the axial deviation speed is significant, it is possible to prevent the disc from colliding with the converging lens 107 and prevent an overcurrent from flowing, which are caused by a failure of the pull-in. Therefore, a stable 25 focus pull-in is achieved.

According to the structure in Examples 1 and 2 for determining that the converging point of the light beam is located at the lower axial deviation limit, a focus error signal FE is used and the output intervals of S-signals or the time width of a predetermined portion of an S-signal is measured. However, the present invention is not limited

to using a focus error signal FE. Other signals representing the converging state of the light beam are alternatively used. Examples of such signals are a total luminous energy signal AS (i.e., the sum total of 4-region photodetector 109), an RF (radio frequency) signal, and a tracking error signal. In the case where such signals are used for the optical disc apparatus of the present invention instead of an focus error signal FE, the configurations of the 4-region optical detector 109, the adder 121, the subtracter 122, the low pass filter, etc., may be appropriately modified. Furthermore, in the case where an focus error signal used as in Examples 1 and 2, the configurations for generating the focus error signal FE is not limited to the configuration shown in the examples. Other configuration may alternatively used for the generation of the focus error signal FE.

The functions for Example 1 described with regard to Figures 5 and 6 may also implemented in Example 2. In that case, the detected interval measuring section 125d and the interval comparing section 125c in Figure 1 may be connected in parallel with the S-shape signal time width measuring section 125l and the time width comparing section 125k between the S-shape signal detection section 125h and the control section 125g.

According to such a configuration, the focus pull-in operation is performed as described with reference to Figure 5. Specifically, if the output of the detected interval measuring section 125d exceeds the time T2 required for one revolution of the disc, it is determined that the focal point of the converging lens 107 has already passed by the lower axial deviation limit. Therefore, the

control section 125g moves the converging lens 107 toward the information surface of the disc 101 at a still lower speed (In order to stabilize the pull-in, it is preferable to set the speed lower than the speed at which the converging lens 107 was moved away from the disc). The pull-in level is determined with regard to the subsequently detected focus error signal FE and then the switch 125g is switched, thereby the focus pull-in operation is achieved. Furthermore, as described with reference to Figure 6, if the next S-shape signal is not detected (i.e., the detected interval measuring section 125d does not generate an output) even after the elapse of the first period T1 after the time when the previous S-shape signal is detected, the control section 125g sends an instruction signal to the lens position moving section 125f so as to stop the motion of the lens position moving section 125f, thereby making the converging point of the light beam wait at Point G, which is located in the vicinity of the lower axial deviation limit. As the disc deviates down toward the converging lens 107, next S-shape signal in the focus error signal FE is detected. With regard to the S-shape signal, the focus pull-in level is determined in the manner described above. Based on the result of the level determination, the control section 125g outputs a signal for switching the switch 125g which is coupled to the lens position moving section 125f, to be coupled to the focus servo control section 125a (Point H in Figure 6), whereby the output of the focus servo control section 125a is output through the D/A converter 125j. The focus servo is thus achieved. According to this method, the time required for the focus pull-in can be reduced.

(Example 3)

An optical disc apparatus according to Example 3 of

the present invention will now be described. The optical disc apparatus in Example 3 further includes a disc identification section for identifying the type of the disc loaded in the optical disc apparatus. Other structures of the optical disc apparatus in Example 3 are the same as the optical disc apparatus in Example 1 or Example 2. The features to be identified include packing density and the thickness of the base material.

Figure 15 illustrates an optical disc apparatus in Example 1 (Figure 1) further including such a disc identification section 125r. Other configurations are basically similar to the optical disc apparatus in Figure 1, and thus the explanation thereof is omitted. The structure and functions of the disc identification section 125r will now be described. Functions of the optical disc apparatus in Example 2 incorporating the disc identification section 125r are basically the same as the optical disc apparatus in Figure 15, and thus the explanation thereof is omitted.

As shown in Figure 15, the disc identification section 125r includes in its interior a digital signal processor (DSP) 125. By using, e.g., the amplitude of the output of the S-shape signal detection section 125h, the disc identification section 125r identifies the type of the loaded disc is either CD (low density, 650 MB/disc), SD (medium density, 4.7 GB/disc), or HD (high density, 15GB/disc). The method for the identification utilizes either a focus error signal FE, an AS (total luminous energy) signal, a TE (tracking error) signal, or an RF signal, or the calculation results of any one or more of these. The present invention is not limited by the identification

method.

Between these discs having different density, the thickness of the base material also differs (e.g., CD: $d_1=1.2$ mm, SD: $d_2=0.6$ mm, HD: $d_3=0.1$ mm). The NA (numerical aperture) and the wavelength of the laser use for reproduction/record are changed depending on the type of the disc.

Figures 16A to 16C each schematically illustrate the relationship between the thickness of the disc base material and the focal point in a CD, a SD, or an HD. As shown in Figures 16A to 16C, the light beam spot or the focal point changes depending on the type of the disc. Along with the change of the focal point, the driving center of the lens (Point M of the S-shape signal in Figure 4) and the control range of the driving center (the level difference between Point M and the peak value of the S-shape signal) also change. Therefore, when a CD is loaded, for example, the converging lens 107 approaches the disc less than in the case of an HD, and on the contrary, when an HD is loaded, no signal is output if the converging lens stays at the same position as in the case of a CD. The present example of the invention provides the disc identification section capable of identifying the initially loaded disc and based on the identification result, switching the speed of the converging point of the light beam moving toward/away from the disc, the wait position of the converging lens, and the setting of the driving limit, thereby preventing the disc from colliding to the converging lens 107 and prevent an overcurrent from flowing, which are caused by a failure of the pull-in. Therefore, a stable focus pull-in is achieved.

Figure 17 is a flowchart illustrating a focus pull-in operation, in which the aforementioned identification of the disc is performed. For example, when the disc identification section 125r determines that a CD is loaded, the control section 125q sets the moving speed at V_c , the drive range at L_c , and the wait position at M_c . When the disc identification section 125r determines that an SD is loaded, the control section 125q sets the moving speed at V_s , the drive range at L_s , and the wait position at M_s . When the disc identification section 125r determines that a HD is loaded, the control section 125q sets the moving speed at V_h , the drive range at L_h , and the wait position at M_h (Steps S40 to S45). The output interval of the S-shape signal is measured based on the set values, and the lower axial deviation limit, which is the position with substantially the minimum velocity of the information medium axial deviation, is detected. As described above, the optical disc apparatus according to the present example further reduces the possibility of a collision between the converging lens and the disc, thereby improving the reliability of the apparatus.

In the case where an optical disc rotates at a low speed (300 to 550 rpm), such as a CD for musical reproduction, a successful pull-in may be possible without detecting the lower axial deviation limit or the moving speed of the converging lens and the axial deviation velocity may become close each other. This may reduce the measurement accuracy of the time width or detected width of the S-shape signal, and may bring about an adverse effect on the pull-in performance. If such is the case, by detecting the number of revolution of the disc 101 by FG signal obtained from the disc motor and estimating the maximum axial deviation

5

10

15

20

25

30

of the signal input to the focus servo control section 125a may be used rather than the signal output from the focus servo control section 125a. In this case, the LPF 140 may be connected to the input terminal of the focus servo control section 125a instead of its output terminal.

If focus is out of control due to an external shock or a scratch on the disc surface, a retry of the focus pull-in is carried out by using the level value stored in the lower limit storing section 142. This process will now be described with reference to Figure 19A to 19C. Figure 19A illustrates the movement of the information surface of the disc due to the axial deviation, Figure 19B illustrates the waveform of the focus error signal (FE) generated in response to the movement in Figure 19A, Figure 19C illustrates the waveform of the output signal of the focus servo control section 125a (LPF output) through a low pass filter. In Figures 19A to 19C, the solid lines represent the waveforms corresponding to the axial deviation at the outer periphery of the disc, and the dashed lines represent the waveforms corresponding to the axial deviation at the inner periphery of the disc. The focal point of the light beam is located at the inner periphery when, for example, the operation is started, and thus the lower limit detection section 141 detects the inner periphery lower limit L(IN1) of the LPF output, which is shown by the dashed line in Figure 19C. The detection method varies, such as peak hold, sampling, and size detection, but the present invention is not limited by the detection method. When the focal point of the light beam moves to the outer periphery of the disc 101 for searching, etc., the axial deviation generally increases, and the outer periphery lower limit L(OU1) is detected and stored. Similarly, when the focal point of light beam is

located at the in-between location on the disc, the detected level of the lower limit will be the value corresponding to the amplitude of the axial deviation at the in-between location (not shown). Accordingly, the stored level is continuously updated in response to the location of the focal point of the light beam.

If the focus is out of control when the light beam is located at the inner periphery of the disc, the retry of the pull-in is performed by moving the focal point of the light beam toward the information surface of the disc as shown by the dashed arrow in Figure 19C. When the LPF output reaches the stored lower limit $L(IN1)$, the output is kept unchanged and the focal point of the light beam waits at the corresponding location $IN1$. Then the disc 101 moves toward the focal point of the light beam, and at the location $IN2$, an S-shape signals shown in Figure 4 appears in the focus error signal FE. A predetermined pull-in level corresponding to the S-shape signal is then detected, thereby the focus loop is closed. Similarly, if the focus is out of control when the light beam is located at the outer periphery of the disc, the retry of the pull-in is performed by moving the focal point of the light beam toward the information surface of the disc as shown by the dashed arrow in Figure 19C. When the LPF output reaches the stored lower limit $L(OU1)$, the output is kept unchanged and the focal point of the light beam waits at the corresponding location $OU1$. Then the disc 101 moves toward the focal point of the light beam, and at the location $OU2$, an S-shape signal such as that shown in Figure 4 appears in the focus error signal FE. A predetermined pull-in level corresponding to the S-shape signal is then detected, thereby the focus loop is closed.

Unlike in Example 2, according to Example 4 of the present invention, it is not necessary to gradually move the converging lens 107 toward the disc for detecting the lower axial deviation limit, whereby the faster focus pull-in is achieved. Therefore, the optical disc apparatus of Example 4 is very effective in the case where the retry of pull-in is performed within a limited process time.

In the structure described above, the lower limit stored in the lower limit storing section 142 is continuously updated during a reproduction or a waiting. Alternatively, the optical disc apparatus according to the present example may be configured to detect and store, at the start of the operation, more than one lower limit corresponding to more than one location located in a radius direction of the information medium. For example, the lower limits at the inner and outer peripheries, or more than one lower limit at any other of a plurality of locations, can be stored. Based on the more than one lower limit stored in the lower limit storing section 142, the suitable lower limits corresponding to desired locations in a radius direction of the information medium, can be obtained by calculations such as linear complement or functional approximation. A calculation section for performing such a calculation may be provided in the lower limit storing section 142. Similar effects can be achieved by using the lower limit corresponding to any locations on the information medium for determining the wait level of pull-in (i.e., the waiting location) at the location where the focus went out of control.

Furthermore, by incorporating the structure


[illegible]


20. An optical disc apparatus according to claim 1, further comprising a lower limit detection section for detecting the lower limit of an output signal of the focus servo control section or an input signal thereof during the operation of the focus servo control section, and a lower limit storing section for storing the detected lower limit.


wherein, in the case where the focus servo control section is restarted after the focus servo control section is OFF: it is determined that the converging point of the light beam is in the vicinity of the minimum velocity position on the information medium axial deviation when the converging point of the light beam contacts on the information surface of the information medium until the output signal or the drive signal reaches the lower limit by driving the moving section; and the focus pull-in section performs a retry operation which restarts the control by the focus servo control section when it is determined that the level of the focus servo signal reaches a predetermined pull-in level.

5 An optical disc apparatus includes: a converging
section for converging a light beam and irradiating a
rotating information medium with the converged light beam;
a moving section for moving the converging section, thereby
moving a converging point of the converged light beam in
a direction perpendicular to an information surface of the
information medium; a converging state detection section
10 for generating a focus servo signal which represents a
converging state of the light beam on the information medium
based on reflected light or transmitted light of the light
beam from the information medium; a focus servo control
section for controlling the moving section based on the focus
15 servo signal, so that the light beam reaches a predetermined
converging state on the information medium; and a focus
pull-in section for turning ON the control by the focus servo
control section, wherein the focus pull-in section turns
ON the control by the focus servo control section in a case
20 where the focus pull-in section determines that the
converging point of the light beam is located in the vicinity
of the minimum velocity position on the information medium
axial deviation.

FIG. 1

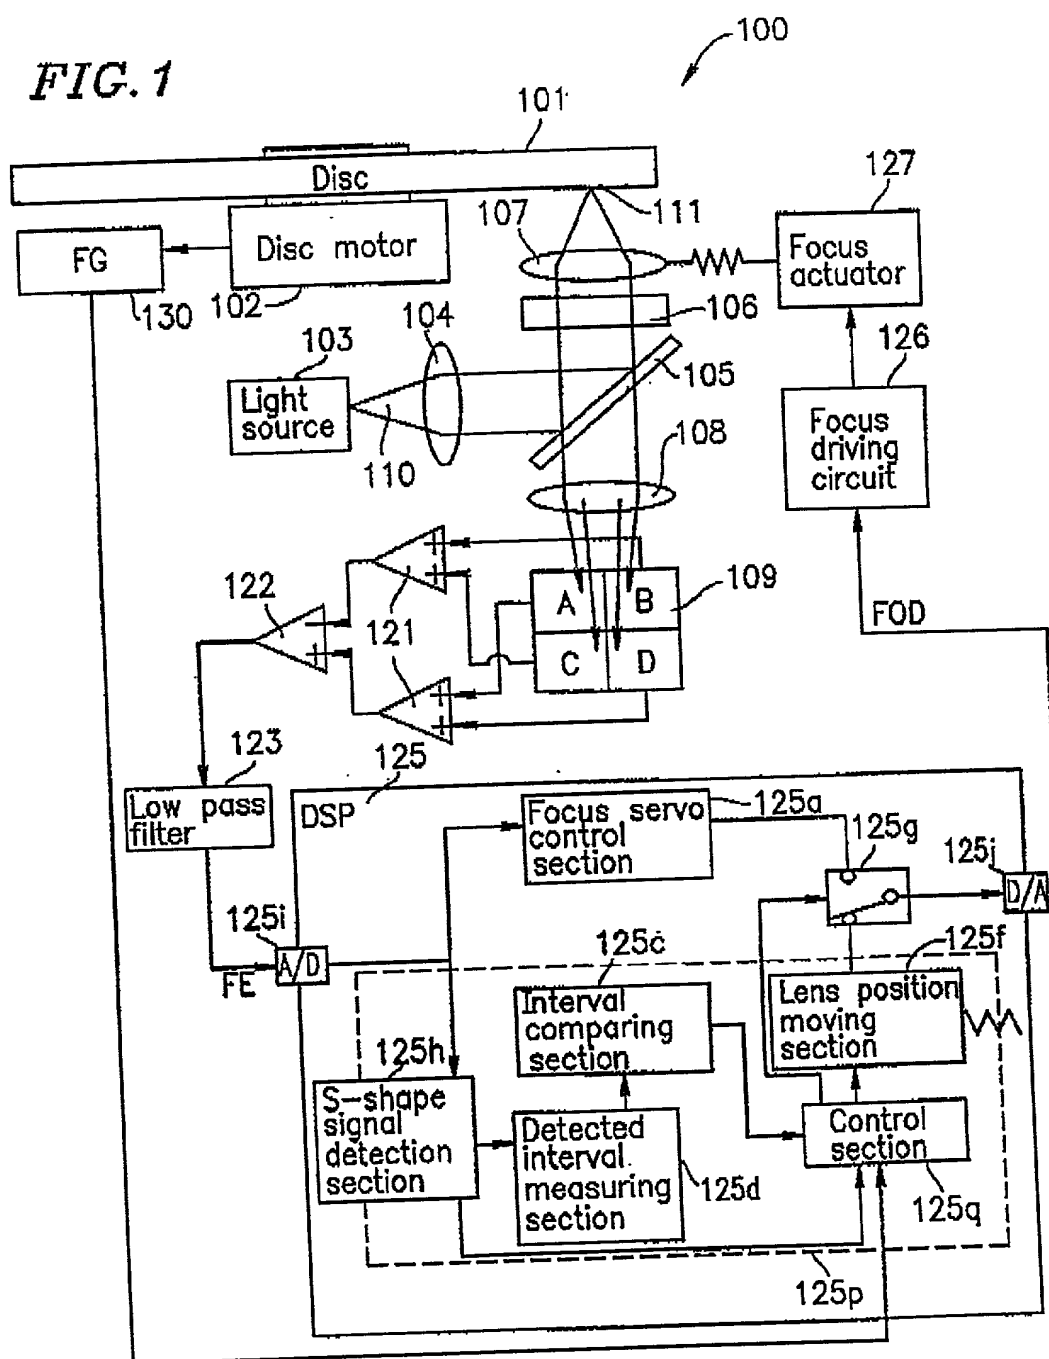

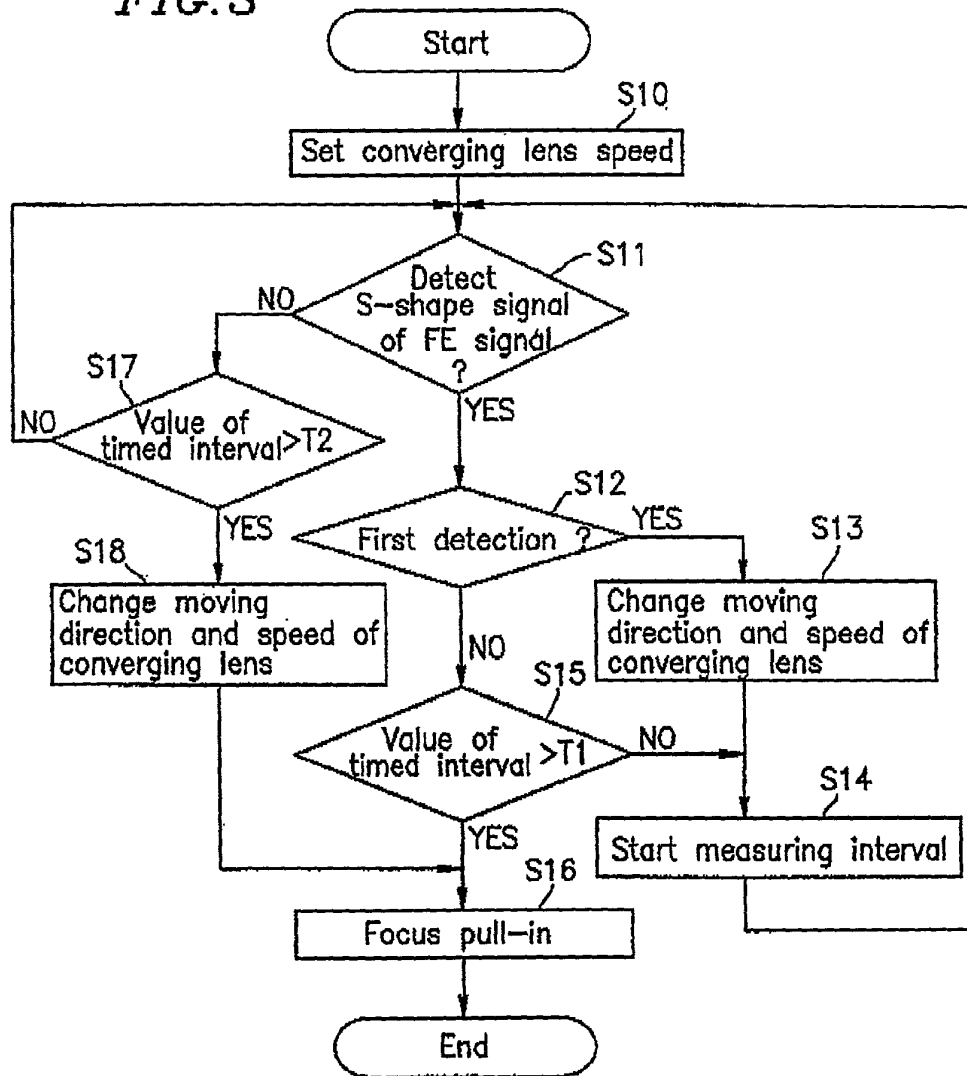[illegible]

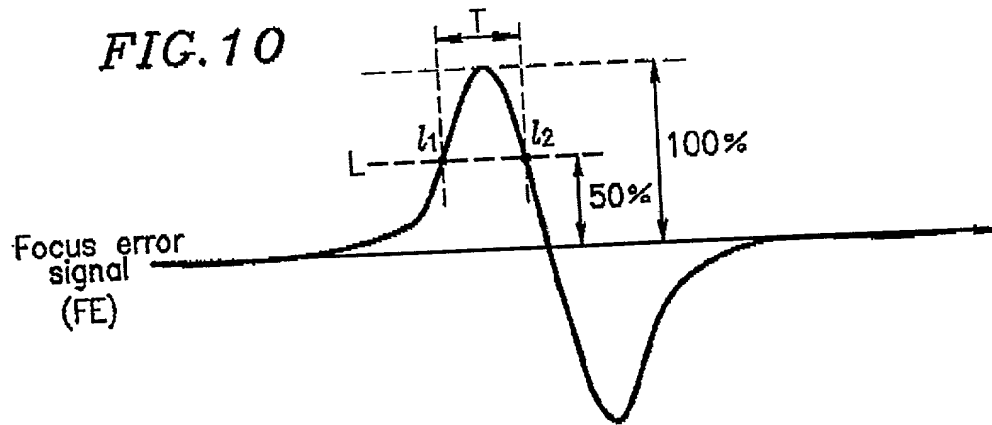

REF ID: A9209900

FIG. 11

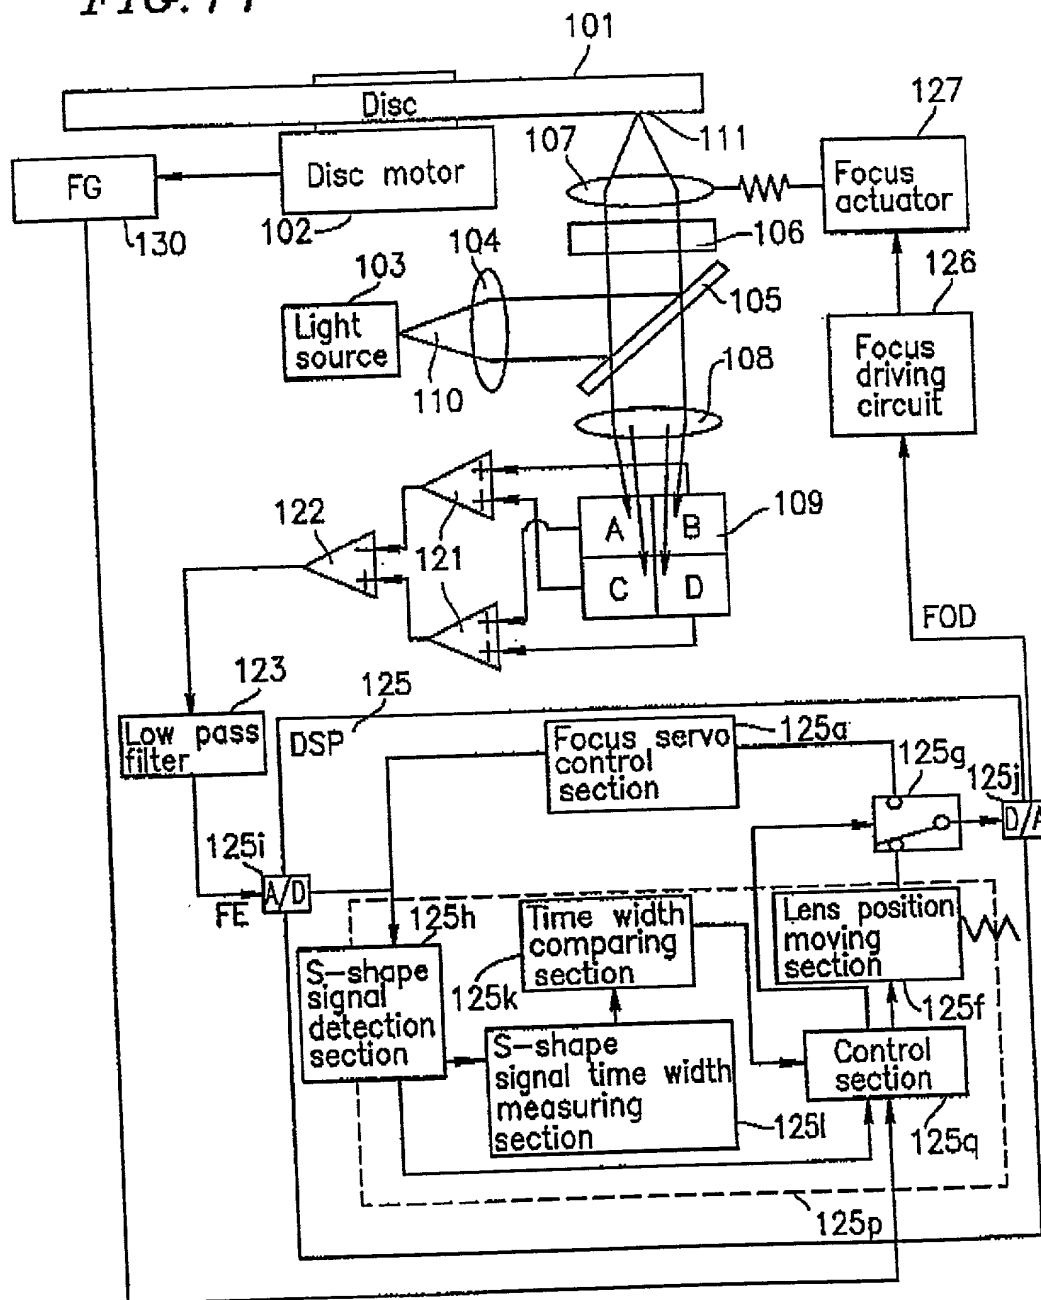


FIG. 13

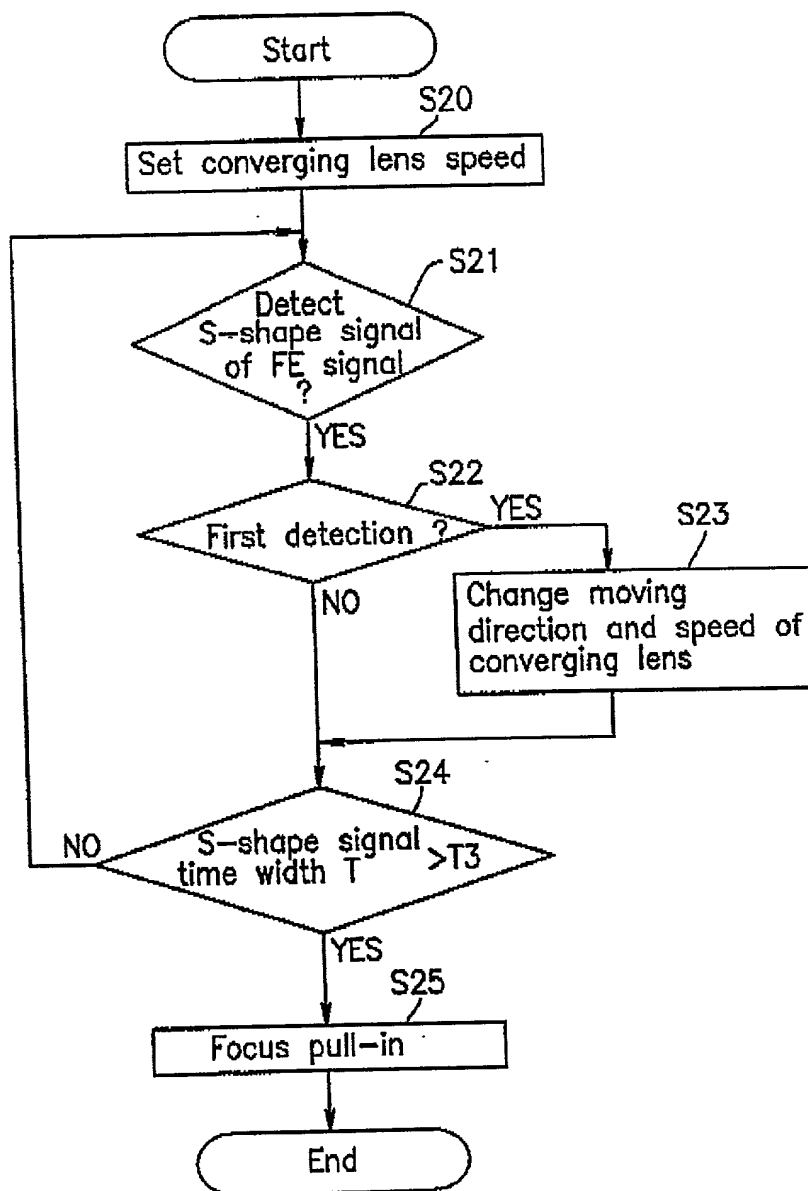


FIG. 16A

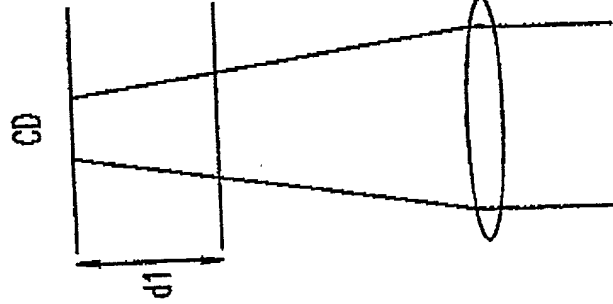


FIG. 16B

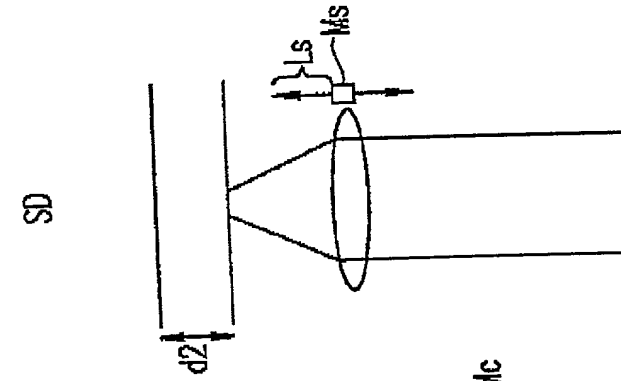


FIG. 16C

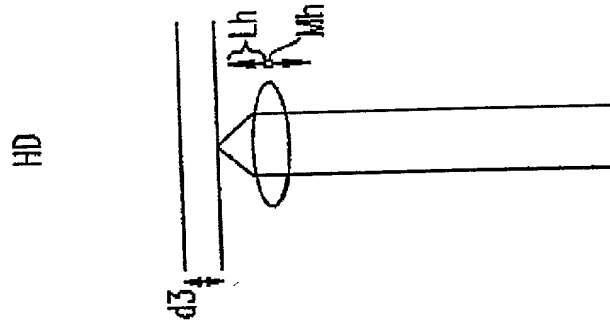


FIG. 17

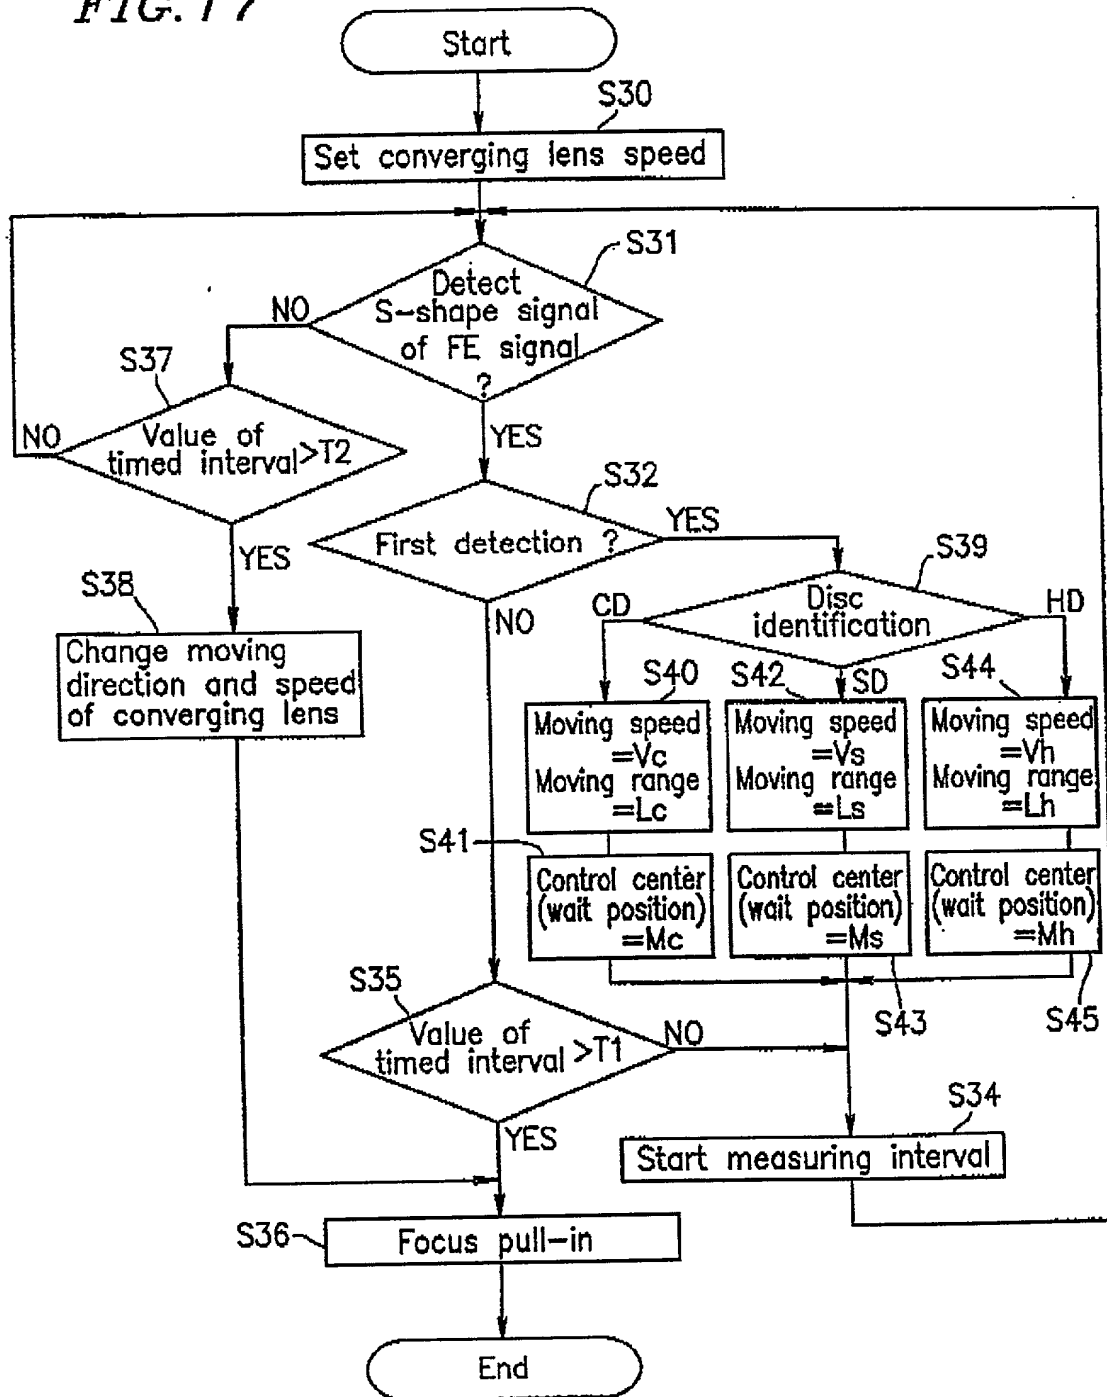


FIG. 19A

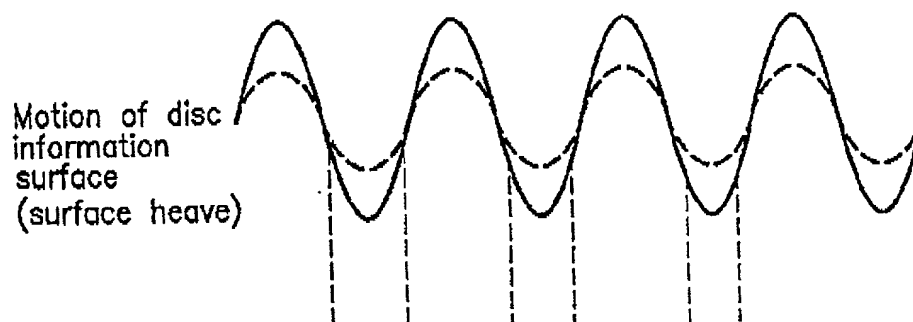


FIG. 19B



FIG. 19C


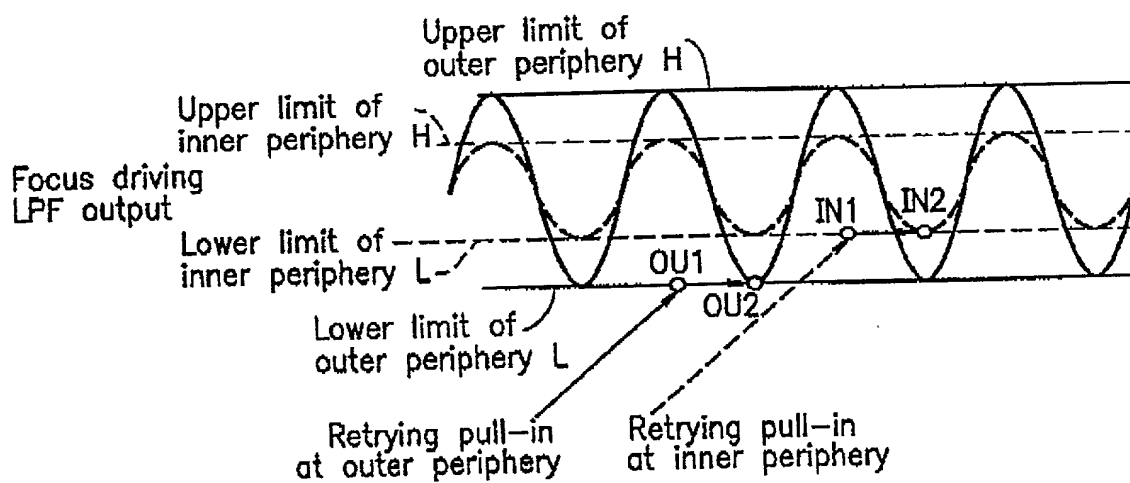


FIG. 20

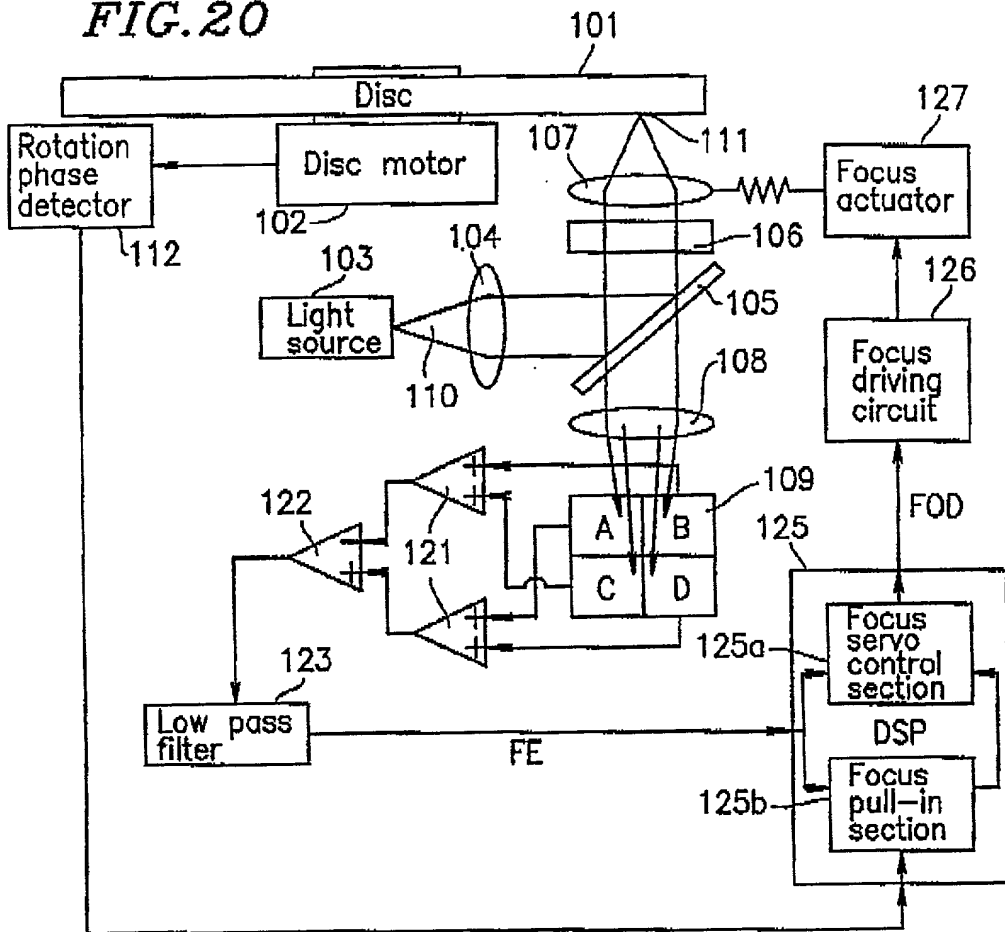

IN THE UNITED STATES PATENT AND
TRADEMARK OFFICE

PATENT

Applicant(s): Yuu OKADA, et al. Docket No.: 28569.6500
Serial No.: Group Art Unit:
Filed: September 13, 2000 Examiner: To Be Assigned
TITLE: OPTICAL DISC APPARATUS

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled OPTICAL DISC APPARATUS, the specification of which:

[X] is attached hereto.

[] was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

<u>11-258578</u>	<u>Japan</u>	<u>September 13, 1999</u>	Priority Not Claimed
Number	Country	Filing Date	[]
<u> </u>	<u> </u>	<u> </u>	[]
Number	Country	Filing Date	

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

Application Number	Filing Date
Application Number	Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

Application Serial No.	Filing Date	Status — Patent, Pending, Abandoned
Application Serial No.	Filing date	Status — Patent, Pending, Abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY

As a below named inventor, I hereby appoint the following attorneys to prosecute the above-captioned United States patent application and to transact all business in the United States Patent and Trademark Office connected therewith and with the resulting patent, individually and collectively:

SNELL & WILMER L.L.P.
One Arizona Center
400 East Van Buren
Phoenix, Arizona 85004-2202
Tel.(602) 382-6000
Fax(602) 382-6070

and the registered attorneys associated with Snell & Wilmer's Customer Number 020322.

Please send all further correspondence to Snell & Wilmer L.L.P. at the above address.

